

## Product Datasheet

# 36-port 10G Uplink Managed Ethernet Fiber Switch

(ARN56368FM+24S)



## OVERVIEW

The ARN56368FM+24S is a 10G uplink managed Ethernet fiber switch independently developed by Airnet Technology Company Ltd. It has 8\*10/100/1000Base-T RJ45 or 8\*100/1000Base-X SFP (comboports) and 16\*100/1000Base-X SFP ports and 4\*1/10G SFP+ fiber slot ports. Each port can support wire-speed forwarding.

The ARN56368FM+24S has L2+ full network management function, supports IPV4/ IPV6 management, static route full wire-speed forwarding, complete security protection mechanism, complete ACL/QoS policy and rich VLAN functions, and is easy to manage and maintain. Supports multiple network redundancy protocols STP/RSTP/MSTP (<50ms) and (ITU-T G.8032) ERPS(<20ms) to improve link backup and network reliability. When one-way network fails, communication can be quickly restored to ensure important Uninterrupted communication for applications. According to the actual application requirements, you can configure multiple application services such as port traffic control, VLAN division, and SNMP through the Web network management mode. It satisfies high-density network application environment and is suitable for medium, large-scale scenes such as hotel, campus, park, shopping mall, scenic spot, hospital, bank to form an economical, efficient and reliable communication network.

## FEATURE

### ■ Gigabit multi fiber port access, 10G SFP+ fiber port uplink

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on Backpressure.
- ◇ Supports Gigabit Ethernet port and gigabit SFP fiber slot port and 1/10G SFP+ fiber slot port combination, which enables users to flexibly build networking to meet the needs of various scenarios.

### ■ Strong business processing capability

- ◇ ERPS/STP/RSTP/MSTP.
- ◇ Static and dynamic aggregation.
- ◇ IGMP V1/V2 and IGMP Snooping.
- ◇ IEEE802.1Q VLAN, flexible VLAN division, Voice VLAN, and QinQ configuration.
- ◇ QoS, Priority mode based on 802.1P, Port & DSCP, queue scheduling algorithm including EQU, SP, WRR & SP+WRR.
- ◇ ALC, filter data packet through configuring matching rules, processing operation & time permission, and provide flexible and safe access control.

### ■ Security

- ◇ 802.1X authentication.
- ◇ Port isolation, Storm control.
- ◇ IP-MAC-VLAN-Port binding.

### ■ Stable and reliable

- ◇ CCC, CE, FCC, RoHS.
- ◇ Low power consumption, galvanized steel casing, with fan.
- ◇ Self-developed power supply high redundancy design, providing a long term and stable power output.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, Link.

## ■ Easy operation and maintenance management

- ◇ HTTPS, SSLV3, and SSHV1/V2.
- ◇ RMON, system log, LLDP, and port traffic statistics.
- ◇ CPU monitoring, memory monitoring, Ping test, and cable diagnose.
- ◇ Web management, CLI command line (Console, Telnet), SNMP (V1/V2/V3).

## TECHNICAL SPECIFICATION


Model	ARN56368FM+24S
<b>Interface Characteristics</b>	
Fixed Port	1*Console RS232 port (115200,N,8,1)
	4*1/10G SFP+ fiber slot ports (Data)
	16*100/1000Base-X SFP ports (Data)
	8*10/100/1000Base-T RJ45 or 8*100/1000Base-X SFP combo port (Data)
Ethernet Port	Port 1-8 support 10/100/1000Base-T(X) auto-sensing, Full/half duplex MDI/MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP(≤100 meters)
	100BASE-TX: Cat5 or later UTP(≤100 meters)
	1000BASE-T: Cat5e/6 or later UTP(≤100 meters)
Optical Fiber Port	Gigabit SFP optical fiber port and 10G SFP+ optical fiber port, default no include optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC)
Optical Fiber Port	Support Turbo overclocking 2.5G optical module expansion and ring

Expansion	network
Optical Cable/ Distance	Multi-mode:850nm//0-500M(1G), 850nm/0-300M (10G) Single-mode:1310nm/ 0-40KM, 1550nm/ 0-120KM.
<b>Chip Parameter</b>	
Network Management Type	L2+
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T, IEEE802.3z 1000Base-X IEEE802.3ae 10GBase-LR/SR, IEEE802.3x
Forwarding Mode	Store and Forward(Full Wire Speed)
Switching Capacity	336Gbps
Forwarding Rate@64byte	95.23Mpps
CPU(Hz)	800MHz
DRAM	1Gbit
Flash	128Mbit
MAC	16K
Buffer Memory	12Mbit
Jumbo Frame	12000byte
LED Indicator	Power: PWR (Yellow), System: SYS(Yellow), Network: Link (Yellow), Fiber port: L/A (Green)
Reset Switch	Yes, press and hold the switch for 10 seconds and release it to restore the factory settings
<b>Power Supply</b>	
Total PWR / Input Voltage	60W/(AC100-240V)
Power Consumption	Standby<20W, Full Load<45W
Power Supply	Built-in power supply, AC 100~240V 50-60Hz 1.0A

Physical Parameter	
Storage TEMP / Humidity	-40~+80°C, 5%~95% RH Non condensing
Dimension (L*W*H)	440*290*44.5mm
Net /Gross Weight	<3.5kg / <4.3kg
Installation	Desktop, 19 inch 1U cabinet installation
Certification & Warranty	
Lightning Protection	Lightning protection: 4KV 8/20us, Protection level: IP30
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS
Warranty	1 years, Replacement Warranty.
Network Management Features	
Interface	<p>IEEE802.3x flow control (full duplex)</p> <p>Port exception protection mechanism</p> <p>Port real-time flow management (Flow Interval)</p> <p>Broadcast storm suppression based on port rate</p> <p>Optical port SFP module DDMI real-time digital diagnosis</p> <p>Limit the rate of incoming and outgoing packet traffic, with a minimum granularity of 16Kbps and a maximum of 1Gbps</p> <p>Port EEE Green Ethernet Energy-Saving configuration and status view</p> <p>Jumbo frame configuration, the largest 12000byte</p>
Layer 3 Features	<p>ARP protocol, 1024 entries at most</p> <p>RIPv1/v2, RIPv6, OSPFv1/v2, OSPFv3</p> <p>Support L2+network management function, support 128 entries of IPv4/IPv6 static routes, and dual stack management</p>
VLAN	<p>VLAN based on MAC, VLAN based on the protocol</p> <p>Port configuration of Access, Trunk, Hybrid, GVRP VLAN protocol</p>

	(4K) VLAN based on port, IEEE802.1q, Voice VLAN, QinQ configuration
Port Aggregation	LACP, Static aggregation Max 14 aggregation groups and 8 ports per group.
Spanning Tree	STP BPDU Guard, BPDU filtering and BPDU forwarding STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)
ERPS Ring Network	Support ERPS ring network, ring network self-healing time is less than 20ms, ITU-T G.8032
Multicast	MLD Snooping, IGMP Snooping, Multicast VLAN User quick log out, MVR (Multicast LAN registration) IGMP Snooping v1/v2/v3 and 1024 multicast groups at most
Mirroring	Bidirectional traffic mirroring for basic ports Supports 1-to-multiple mirroring, supports up to 4 port sessions
QoS	Queue Scheduling Algorithm (SP, WRR, SP+WRR) Flow-based Rate Limiting, Stream based redirection Flow-based Packet Filtering, 8*Output queues of each port 802.1p/DSCP priority mapping, Diff-Serv QoS, Priority Mark/Remark
ACL	ACL distribution based on port and VLAN L2-L4 packet filtering function, matching the first 80 bytes message, and provides ACL definitions based on source MAC address, destination MAC address, source IP address, destination IP address, IP protocol type, TCP/UDP port, TCP/UDP port range, VLAN, etc.
Security	Port based IEEE802.1X authentication SSL guarantees data transmission security Quad binding function of IP+MAC+VLAN+ports MAC address learning limit, MAC address black hole Anti DoS attack, Port broadcast message suppression IP Source Guard function, AAA&RADIUS certification Hierarchical user management and password protection SSH 2.0 provides a secure encrypted channel for user login

	Host data backup mechanism, ARP intrusion detection function Port isolation, IP Source Guard, ARP message speed limit function
DHCP	DHCP Client, DHCP Snooping, DHCP Server
Management	Web network management (https) Link Layer Discovery Protocol(LLDP) Viewing CPU Instant Utilization Status NTP clock, One click restore, SNMP V1/V2C/V3 Cable status check, Ping detection, System work log ONV NMS platform cluster management (LLDP+SNMP) Console/AUX Modem/Telnet/CLI command line configuration FTP, TFTP, Xmodem, SFTP file upload and download management
System	Category 5 Ethernet network cable Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42or higher, Microsoft Internet Explorer10 or later TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, or Mac OS X) installed on each computer in a network

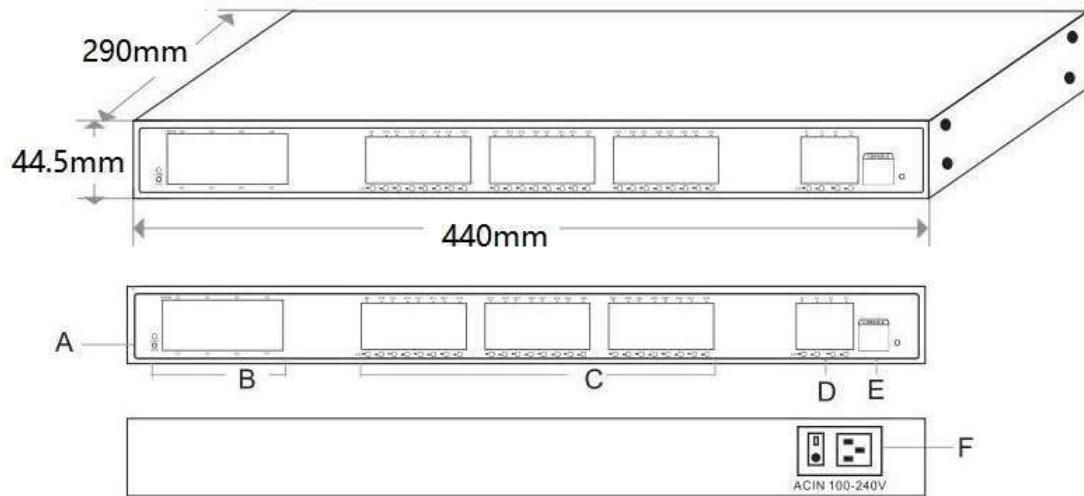

A. Working indicate

B. 8\*10/100/1000M RJ45 ports


C. 24\*100/1000M SFP ports

D. 4\*10G SFP+ ports

E. Console port

F. Power input port AC100-240V, 50/60Hz

## APPLICATION

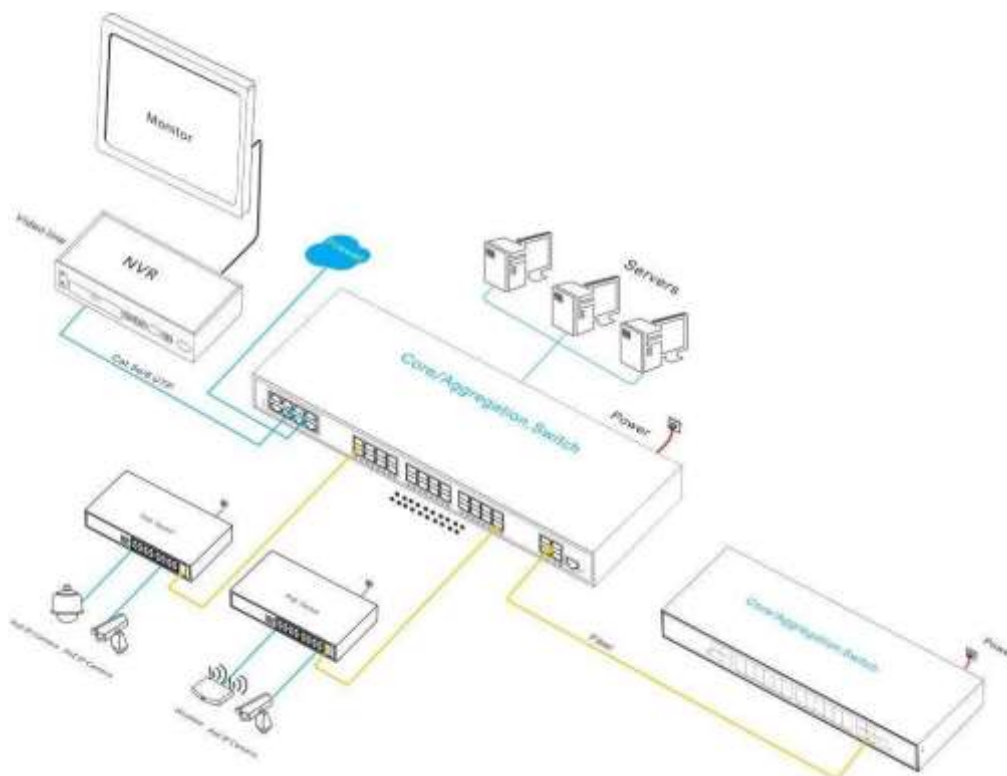

## ORDERING INFORMATION

Model	Description	Built-in Power Supply
ARN56368FM+24S	L2+ managed Ethernet aggregation /core fiber switch with 8*10/100/1000Base-T RJ45 or 8*100/1000Base-X SFP(combo ports) and 16*100/1000Base-X SFP ports and 4*1/10G SFP+ fiber slot ports. Support 1U/19 inch rack installation.	60W

**Note:** The SFP optical module is not included by default and needs to be purchased separately.

## PACKING LIST

Packing List	Content	Qty	Unit
	36-port 10G uplink managed Ethernet fiber switch	1	SET
	AC Power Cable	1	PC
	RJ45-DB9 Line	1	PC
	Mounting Kits(Hanging Ear)	1	SET
	User Guide	1	PC
	Warranty Card	1	PC